




BRONZE GATE VALVE PN20

SPECIFICATIONS	TESTING & CERTIFICATION	
'SBM' bronze wedge gate valve	Body Test Pressure	300 Psig Hy d.
Inside screw	Seat Test Pressure	200 Psig Hyd.
Non-rising stem		
Integral seats		
Screwed female ends (BSP)	Water	
Handwheel operated	Oil	

SANT & SBM
VALVES

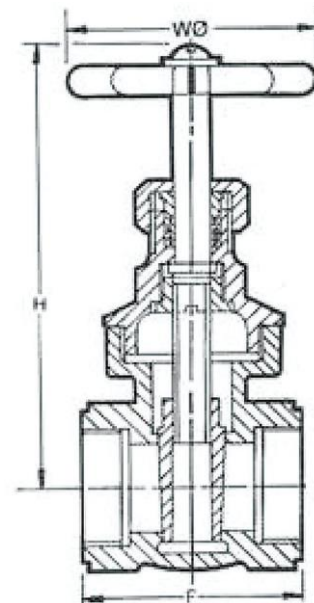

DI			
Nominal Size	F	H	W
8	43	90	50
10	43	95	50
15	45	85	50
20	51	100	60
25	64	115	65
32	66	130	80
40	70	155	80
50	76	195	90
65	95	210	105
80	112	260	115
100	127	305	145

MA		
Components	Material	Material Specification
Body, Bonnet, Wedge, Gland & Gland Nut	Leaded Tin Bronze	15:318 Gr.LTB2
Stem	Forged Brass	15:6912 Gr.FLB
Gland Packing	Asbestos	15:4687
Handwheel	Cast Iron / Steel	15:210 Gr.FG200
Screw & Washer for Handwheel	Mild Steel	15:226

jhb@valvespec.co.za
+27 11 397 6922

dbn@valvespec.co.za
+27 31 569 6325

www@valvespec.co.za

SANT & SBM
VALVES